


PU PNEUMATIC HOSE





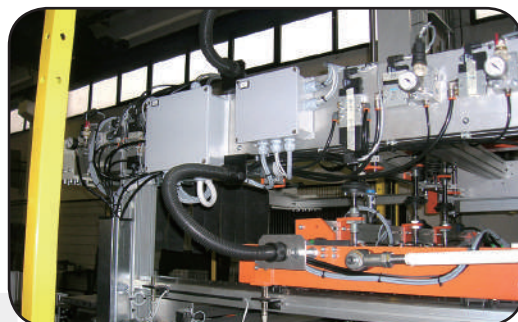




Construction:

Material: Polyurethane

Characteristic:

Has excellent flexibility, the beveling radius is small; Good anti-knocking property; The nature is light; The operating temperature and the working pressure scope is wide; Has

the excellent chemical properties, the pressure loss is minimum; Degree of hardness is constant, the service life is long; Non-toxic, tasteless; Custom-made color is doable, easy pipeline recognition, Conforms to the ROHS environmental protection requirement.

| Item Code |  |  |  |  |  |  |  | |
|----------------|---|---|---|---|---|---|---|-----|
| | mm | mm | bar | bar | kg/reel | mm | m/roll | |
| METRIC SYSTEM | PU2030 | 2 | 3 | 10 | 32 | 1.4 | 8 | 200 |
| | PU2540 | 2.5 | 4 | 10 | 32 | 2.3 | 10 | 200 |
| | PU3050 | 3 | 5 | 10 | 32 | 3.6 | 8 | 200 |
| | PU4060 | 4 | 6 | 8 | 24 | 4.3 | 15 | 200 |
| | PU5080 | 5 | 8 | 10 | 32 | 4.2 | 20 | 100 |
| | PU5580 | 5.5 | 8 | 8 | 24 | 3.7 | 20 | 100 |
| | PU6510 | 6.5 | 10 | 8 | 24 | 6.1 | 25 | 100 |
| | PU8012 | 8 | 12 | 8 | 24 | 8.2 | 35 | 100 |
| | PU1014 | 10 | 14 | 8 | 24 | 9.4 | 45 | 100 |
| | PU1216 | 12 | 16 | 8 | 24 | 11.3 | 70 | 100 |
| BRITISH SYSTEM | PU1316 | 13 | 16 | 6 | 18 | 8.9 | 80 | 100 |
| | PU1/8 | 2 | 3.2 | 10 | 32 | 1.6 | 8 | 200 |
| | PU5/32 | 2.5 | 4 | 10 | 32 | 2.3 | 10 | 200 |
| | PU1/4 | 4.6 | 6.4 | 8 | 24 | 4.2 | 15 | 200 |
| | PU5/16 | 5 | 8 | 10 | 32 | 4.2 | 20 | 100 |
| | PU3/8 | 6.5 | 9.6 | 8 | 24 | 5.1 | 25 | 100 |
| PU1/2 | 9.6 | 12.6 | 8 | 24 | 6.7 | 35 | 100 | |