
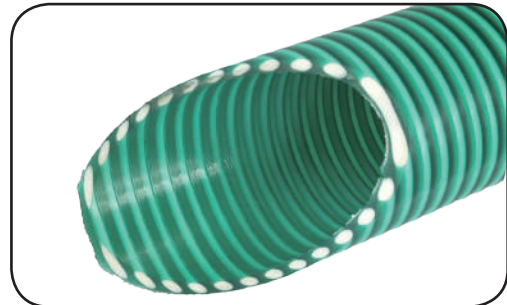


GENERAL PURPOSE PVC SUCTION HOSE

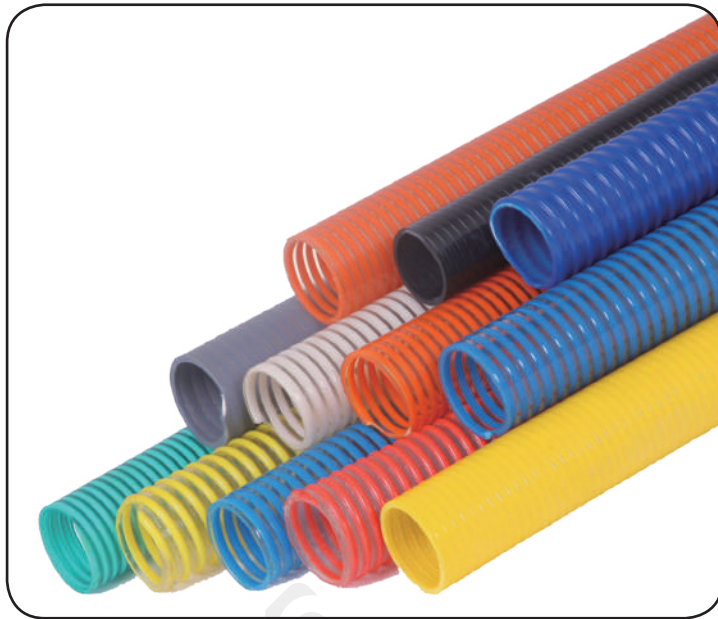

PVC SUCTION HOSE

Construction:

High quality pvc with rigid pvc helix

Applications:

PVC suction hose is designed for regular water supply and drainage, and for transporting various powdery particles and liquids, it is widely used in civil and building works ,agriculture,mining, construction,ship and fishery.

Temperature:-10°C (-50 °F) to 65°C (+150 °F)

HEAVY DUTY

Features:

- Economical & flexible
- Abrasion & chemical resistant
- Impact & crush resistant
- Excellent bending radius
- Constructed with rigid spiral helix reinforcement
- Smooth inner construction for unrestricted flow of materials

Item code	I.D		O.D	Wall Thickness	W.P		VACUUM	R	L	Dimension	M ³
	inch	mm	mm	mm	bar	psi	mmHg(68°F)	mm	m	D*H(cm)	m ³ /roll
PSHH019	3/4	19.0±0.5	25.0±0.5	3.0	5.0	75	750	70	50	60x20	0.072
PSHH025	1	25.4±0.5	31.4±0.5	3.0	5.0	75	750	70	50	60x25	0.090
PSHH032	1 1/4	31.7±0.5	37.7±0.5	3.0	5.0	75	750	90	50	70x30	0.147
PSHH038	1 1/2	38.1±0.5	45.1±0.5	3.5	5.0	75	750	110	50	80x30	0.192
PSHH050	2	50.8±1.0	58.8±1.0	4.0	5.0	75	750	150	50	100x25	0.250
PSHH065	2 1/2	63.5±1.0	72.5±1.0	4.5	4.0	60	750	180	50	115x35	0.463
PSHH075	3	76.2±1.0	86.2±1.0	5.0	4.0	60	750	220	50	135x40	0.730
PSHH100	4	101.6±1.5	103.6±1.5	6.0	4.0	60	750	330	50	200x35	1.400
PSHH125	5	127.0±1.5	141.0±1.5	7.0	3.0	45	750	500	50	230x42	2.220
PSHH152	6	152.4±1.5	168.4±1.5	8.0	3.0	45	750	700	30	230x35	1.850
PSHH200	8	203.2±1.5	225.2±1.5	11.0	2.5	38	750	1100	12	1200x230	0.640
PSHH250	10	254.0±1.5	278.0±1.5	12.0	2.5	38	750	1400	12	1200x280	0.941
PSHH300	12	304.8±1.5	328.8±1.5	12.0	2.5	38	750	1800	12	1200x330	1.310
PSHH350	14	355.6±1.5	379.6±1.5	12.0	2.5	38	750	2200	12	1200x383	1.761